

# Detector Switches

## DSC Series

### ■ Features


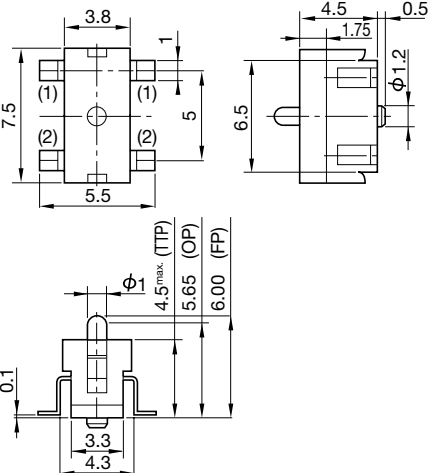
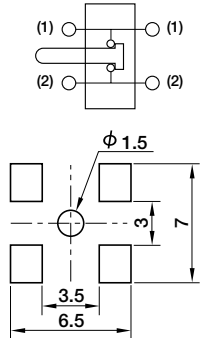

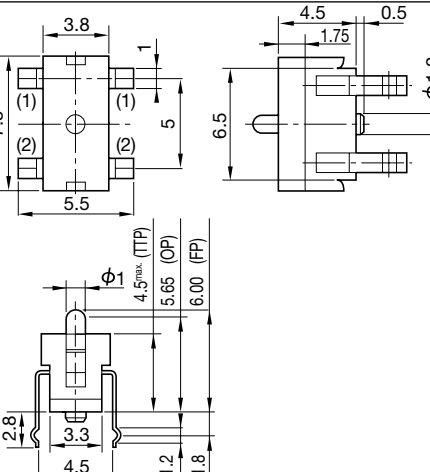
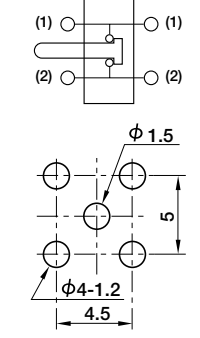
1. It is of self-cleaning construction, showing a high level of contact reliability.
2. It is serviceable as a reset switch in addition to the detector.

### ■ Specification

1. Rating : 0.1 to 5mA, 5V DC
2. Contact Resistance : 300mΩ max.
3. Insulation Resistance : 100MΩ min.
4. Withstanding Voltage : 100V AC (for one minute)
5. Circuit : SPST
6. Operating System : Non-lock, push-off
7. Operating Force : 0.25±0.15N
8. Maximum Force : 0.45±0.2N
9. Operating Life : 100,000 cycles
10. Operating Temperature Range : -10°C to +70°C

### ■ Applications

Car audios, PCs, PC peripherals, TVs, DVD players, industrial equipment, business equipment, home appliance and healthcare products.

<p><b>JPS110-21□1</b></p> <p>SMD Type</p>  <p>1,000 pcs/reel</p>		<p>Circuit : SPST</p>  <p>P. C. Board Dimension</p>
<p><b>JPS110-2201</b></p> <p>Discrete Type</p> 		<p>Circuit : SPST</p>  <p>P. C. Board Dimension</p>

□	Part No.
0	Product Part No.
1	Embossed Taping Packing Part No.

\*Delivery will be made on embossed taping.