

Push Switches

Thin Type Horizontal Push Switches

■ Features


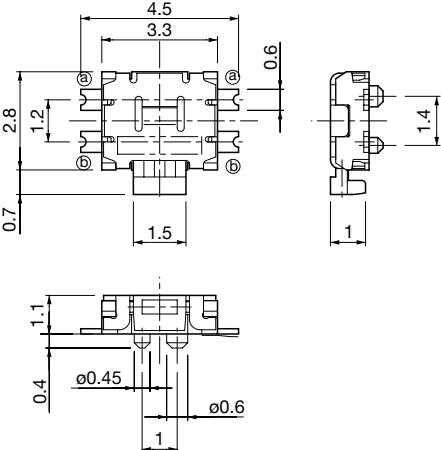


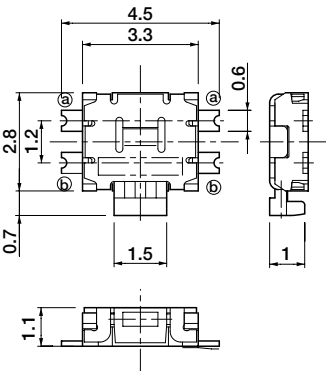

1. The industry's thinnest class of 1.1mm is materialized.
2. Two types are available with- or without-a-boss.

■ Specification

1. Rating : 50mA, 12V DC
2. Contact Resistance : 1Ω max.
3. Insulation Resistance : 100MΩ min.
4. Withstanding Voltage : 250V AC (for one minute)
5. Circuit : SPST
6. Operating Force : 1.5±0.6N
7. Travel : 0.2±0.15mm
8. Operating Life : 100,000 cycles
9. Boss : With (JPM1990-4911F)
Without (JPM1990-5011F)
10. Operating Temperature Range : -30°C to +70°C

■ Application

Mobile phones, smart phones, digital still cameras, car audios, portable audios, PCs, PC peripherals, TVs, DVD players, industrial equipment, business equipment, home appliance and healthcare products.

<p>JPM1990-4911F</p>  <p>5,000 pcs/reel</p>		<p>Circuit : SPST</p>  <p>P. C. Board Dimension</p>
<p>JPM1990-5011F</p>  <p>5,000 pcs/reel</p>		<p>Circuit : SPST</p>  <p>P. C. Board Dimension</p>