

Multifunctional Switches

Small Multi Way Switches, JXS IV Series

■ Features

1. A multifunctional switch capable of function selection in 4 directions and entry of the selected function.
2. The industry's smallest and thinnest design (1.6mm) (less than 30% of our previous equivalent product), measuring only 6.5mm(W) × 6.5mm(D) × 1.6mm(H).
3. With a center push function.
4. Reflow solderable.

■ Application

Automotives, motorcycles, digital still cameras, car audios, portable audios, PCs, PC peripherals, TVs, DVD players, industrial equipment, business equipment, home appliance and healthcare products.

Multifunctional Switches

Part No.		JXS0000-16□1F	JXS0000-18□1F
Rating		10mA, 12V DC	10mA, 5V DC
Contact Resistance		500mΩ max.	
Insulation Resistance		100MΩ min.	
Withstanding Voltage		100V AC (for one minute)	
Circuit	Tilt Direction	SP4T	
	Push Direction	SPST	
Operating Force	Tilt Direction	2.5±1.5N	1.2 ^{+0.8} _{-0.6} N
	Push Direction	3.5±2.0N	2.2±1.2N
Stroke	Tilt Direction	4 ^{+3°} _{-2°}	
	Push Direction	0.15 ^{+0.2} _{-0.1} mm	
Operating Life	Tilt Direction	100,000cycles	
	Push Direction	100,000cycles	
Key Color		Black	White Milk
Operating Temperature Range		-25°C ~ +70°C	

□	Part No.
0	Product Part No.
1	Embossed Taping Packing Part No.



*Delivery will be made on embossed taping.

Multifunctional Switches

Small Multi Way Switches, JXS IV Series

JXS0000-16□1F
(With Earth Terminal)

1,500 pcs/reel

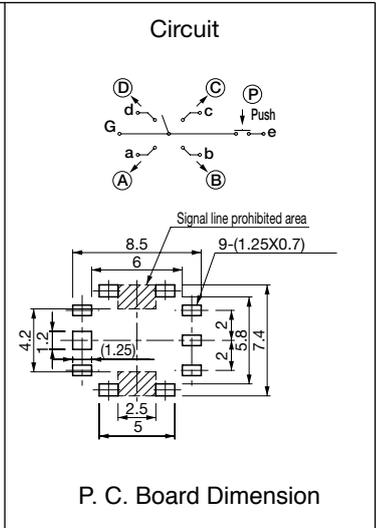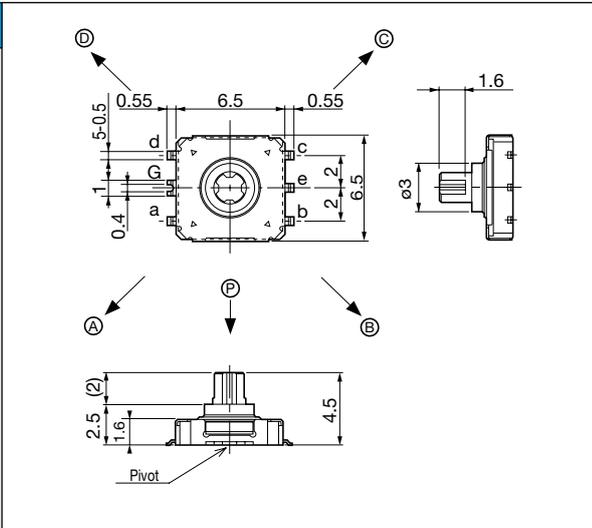

JXS0000-18□1F
(With Earth Terminal)

1,500 pcs/reel

